
## FRONT SIDE



## **BACK SIDE**


# How To Fill The Water Tank/Drain Water **How To Replace The Water Curtain** Filling Your Blaux Portable AC - G2:

1. Open the top cover

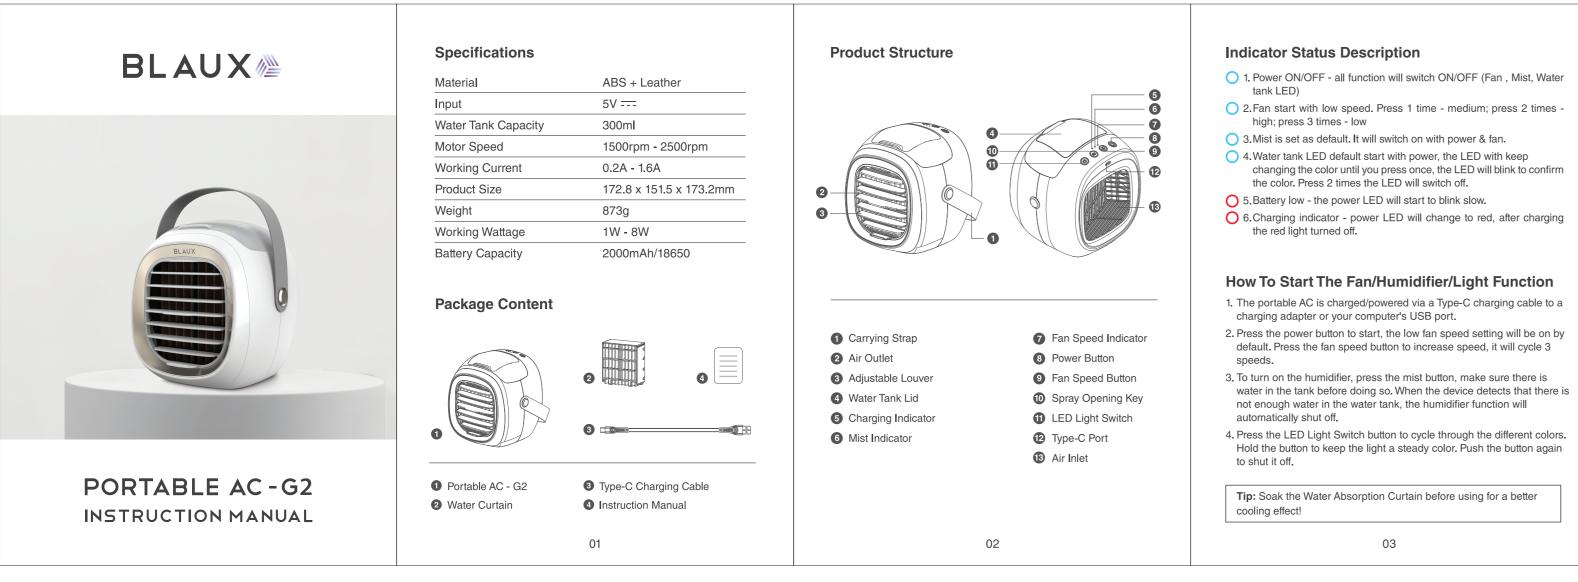




1. Open the top cover




any of the buttons wet

2. Fill the water tank with water

Attentation: After the product is filled with water, it must remain upright to prevent any water from penetrating the circuit board or fan.








3. Replace the water absorption 4. Push the front grill back in

Tips: If not using the fan for a long time, drain the water from the tank and blow-dry the curtain. Water absorption curtains generally last 6-8 months. Replace accordingly based on personal use.

### **Safety Precautions**

- Check device voltage compatibility with this product before using it;
- Do not disassemble product or handle it roughly;
- Avoid exposure to heat or direct sunlight;
- Keep product out of reach of children and pets;
- Please use included Type-C Cable and 5V/2A adapter;
- Regularly clean the inside and outside of the fan to prevent dust from accumulating. Before cleaning the fan, be sure to turn off the product and unplug the power cord;
- Do not put your fingers or hard objects into the intake/outlet;
- Stop using the product if it starts to malfunction.

**C** The device complies with the European Directives 2014/30/EU.

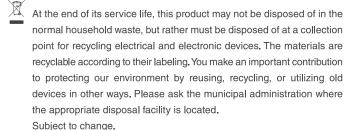

This device complies with part 15 of the FCC Rules.

封面

IM Dimensions: 148 x 105mm Double Side Printing CMYK